

The Multi-Tap design allows for laying simultaneous runs for landscape lights according to your specifications and design layout. Transformer is user friendly with compact design, Terminal Blocks for output wires, Secondary re-settable magnetic circuit breakers, whisper quiet operation and 6- foot heavy duty power cord. This unit is 300watts total with 12,13,14, and 15 volt outputs. Rugged stainless steel enclosure.



Notes:

1. Output voltage in table 1 with 120Vac and fully loaded.
2. Maximum no load input current : 0.6A
3. Enclosure temperature does not exceed 70C in 40C ambient, fully loaded.
4. Transformer fully encapsulated.
5. Dimmable with all dimmers designed for magnetic transformers.
6. Input line cord - 3x 18 AWG, output terminal block - 12-2 AWG (4-35 sq mm)
7. Output terminal block rated for 125A 800V
8. Photo-cell connector rated for 13A 250V
9. Transformer uses a class B (130C) insulation system.
8. Transformer has a manual reset thermal 25A circuit breaker on the secondary.
9. Wiring compartment has one 0.95 inch Knockout, two 1.13 inch knockouts, one 0.87 inch knockout for power cord and one 1.75 inch.
10. The wiring compartment cover is hinged with rivets and opens vertically from bottom to top.
11. The enclosure is made of stainless steel and NEMA 3R rated.
12. UL1012 listed

Table 1.

Terminal Block Label	Output Volts
12V	12.2
13V	13.2
14V	14.3
15V	15.0

Dimensions inches [mm]

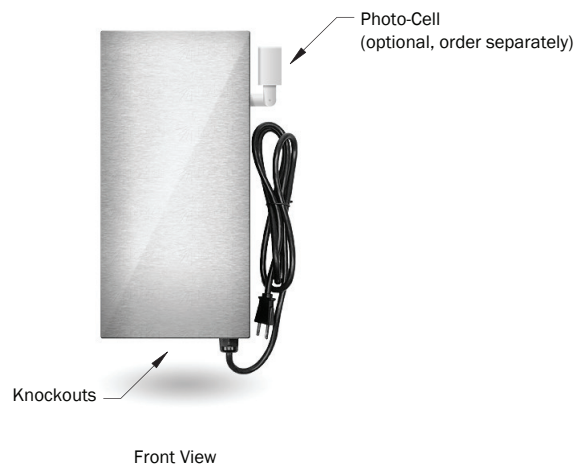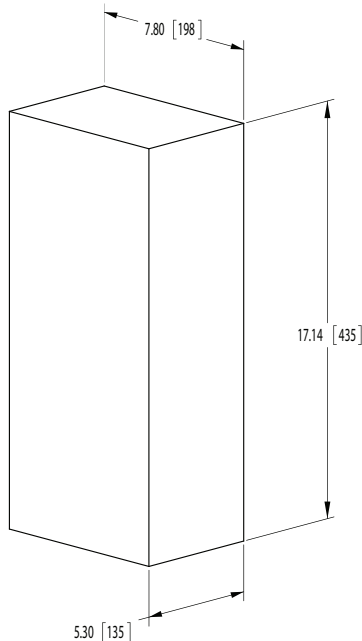

2880 Scott St., Bldg 107, CA 92011
 760-734-1123 760-734-1176 Fax
 www.dglights.com info@dglights.com