


Project: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

The PL is a classic style low energy path and area light. Robust design adds essential safety and security. Superior lasting LED technology delivers reliable low maintenance service. CR LED module provides tool-free service and upgrades.

Engineered specifically for today's LED technology the PL's design provides critical thermal transfer. Excellent heat removal ensures high performance and reliability of its LED light source. Other features include anti-wicking power lead and service upgrade capability.

The PL is available in multiple finishes and accessories. Suitable for use in wet locations.

**Specification**

Light Source	C-Socket™ Quick Change™ CR LED Module *
LED Rated Life	50,000 hours average **
Input	8-12Vac
Power Consumption	3 Watts
Standard LED Color	2700K +/- 175 CCT Typical
CRI	80 Typical
Diffuser	Heavy wall Clear Acrylic
Cable Lead	3ft 18-2 AWG Direct Burial Rated
Standard Mounting	ABS Cap and PVC Post
Operating Temperature	-31F to 122F (-35C to 50C)
Maintenance	Field serviceable LED Module
Thermal Management	Fixture is utilized as heat sink
Ingress Protection	IP66
Certification	

\* IES LM-80 Standard ensures led light source will provide lumen maintenance and color performance.

\*\* LED life is defined as the time to 70% lumen maintenance (L70)

**Remote Low Voltage Transformer Required**

Mounting Options ( Not to Scale )

PC




Metal Cap\*

BS



Brass Spike


PM




Pedestal Mount\*

\* Specify Separately

**Dimensions inches [ mm ]**

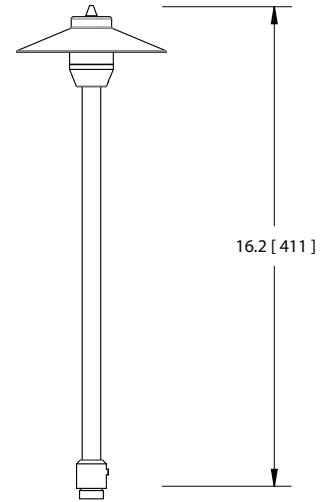

5 [ 127 ] Top

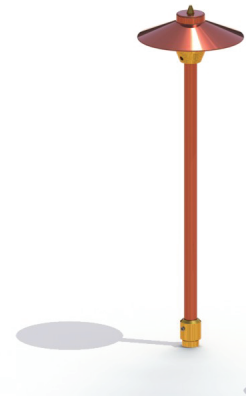

**Ordering Guide**

Example: **PL-CU-27-5-15-N-PM** PL , Copper, 2700K, 5 inch top, 15 inch Post height, Natural Finish, Pedestal Mount

PL						
Prefix	Material	LED Color	Top Size	Post Height	Finish	Mounting
BR - Brass	27 - 2700K	3 - 3 inch	15 - 15 inch Standard	N - Natural	PV - ABS Cap PVC Post (Standard)	
CU - Copper	30 - 3000K	5 - 5 inch	18 - 18 inch	BK - Black	PC - Metal Cap *	
	40 - 4000K		24 - 24 inch	WT - White	BS - Cast Brass Spike	
	57 - 5700K		C - Custom	BN - Brown	PM - Pedestal Mount *	
				GN - Green		
				MP - Silver	* Specify Separately	
				NK - Nickel		
				PT - Patina		
				C - Custom		



2880 Scott Street, # 107, Vista, CA 92081  
 +1 760-734-1123 Tel +1 760-734-1176 Fax  
 www.dglights.com info@dglights.com

