


Project _____ Type _____ Quantity _____


The CZSQ is used to illuminate area and walkways. Constructed from CNC machined parts and heavy wall tubing. 10 inch ABS stake standard mounting, optional cast brass stake or stainless pedestal mount.

Specification

Light Sources	COB LED Module *
LED Rated Life	50,000 hours average **
Power Consumption	3 Watts
CCT	2700K, 3000K, 4000K, 5000K
CRI	93
Light Output	200 Lumens
Input	10-15 Vac
Lens	Borosilicate Glass
Fasteners	Stainless steel
Operating Temperature	-31F to 130F (-35C to 54C)
Maintenance	Field serviceable Driver and LED module
Thermal Management	Fixture is utilized as heat sink
Fixture Construction	CNC Machined from Solid Billet and heavy wall tubing
Ingress Protection	IP67
Certification	

* IES LM-80 Standard ensures led light source will provide lumen maintenance and color performance.

** LED life is defined as the time to 70% lumen maintenance (L70)

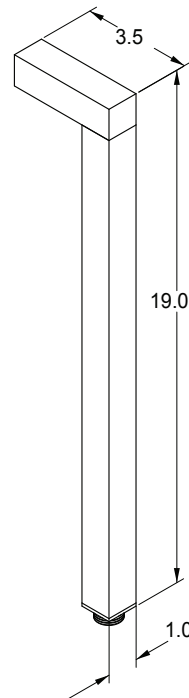


Dimensions inches

BS



9 inch
Brass
Stake

PM



9 inch
Pedestal
Stainless

Ordering Guide

Example: CZSQ-BR-27-18-S-PTB Brass Material, 2700K, 18" Post Height, 10 inch ABS stake, Patina Brown Finish

Prefix	Material	CCT	Height	Mounting	Finish
CZSQ	AL - Aluminum BR - Brass CU - Copper	27 - 2700K 30 - 3000K 40 - 4000K 50 - 5000K	12 - 12 inch 18 - 18 inch C - Custom	S - Standard BS - Brass Stake PM - Pedestal	N - Natural NK - Nickel (Brass Material) BK - Black Powder Coat PTB - Patina Brown (Brass Only) PTK - Patina Black (Brass Only) C - Custom