


GL2B

Walkway/Counter/Table

Project _____ Type _____ Quantity _____

The GL2B is of scale to be used to illuminate walkways and at the same time counter and table tops. Glare free illumination is perfect for outdoor living areas.



Specification

Light Source	High efficiency COB module
LED Rated Life	50,000 hours average **
Power Consumption	1W, 2W, 3W, 5W Options
CCT	2700K, 3000K, 4000K, 5000K
CRI	93
Light Output	25, 50, 150, 225 Lumens
Input	10-15 Vac
Lens	Low glare frosted acrylic
Lamp holder	GU5.3
Operating Temperature	-31F to 130F (-35C to 54C)
Mounting	10" ABS Ground Stake
Maintenance	Tool Free LED module
Thermal Management	Fixture is utilized as heat sink
Fixture Construction	CNC Machined from Solid Billet, heavy wall tubing
Ingress Protection	IP67
Certification	

* IES LM-80 Standard ensures led light source will provide lumen maintenance and color performance.

** LED life is defined as the time to 70% lumen maintenance (L70)


Low Voltage Transformer Required

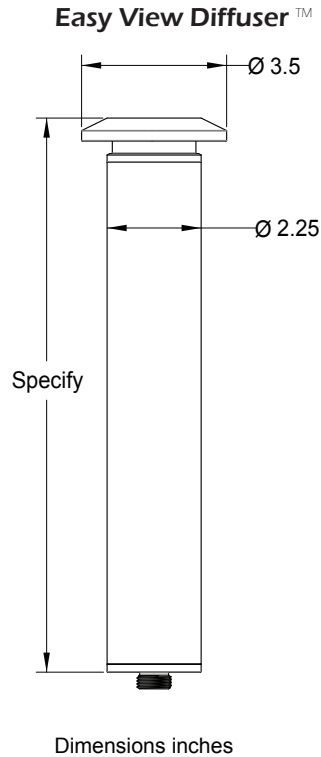

Flange Mount



Surface Mount



Pedestal Mount

Ordering Guide

Example: GL2B-BR-27-3-18-3-PS-PTB Brass, 2700K, 3Watt, 18", 3.5" Top, ABS Stake, Patina Brown Finish

GL2B							
Prefix	Material	CCT	Watt	Height	Top	Mounting	Finish
AL - Aluminum	27 - 2700K	1 - 25 lm	3 - 3 inch	2 - 2.25" Dia.	PS - Ground Stake	N - Natural	
BR - Brass	30 - 3000K	2 - 50 lm	6 - 6 inch	3 - 3.5" Dia.	FG - Flange	BK - Black Powder Coat	
CU - Copper	40 - 4000K	3 - 150 lm	12 - 12 inch		SM - Surface	WT - White Powder Coat	
SS - Stainless	50 - 5000K		18 - 18 inch		PM - Pedestal	PTB - Patina Brown (Brass Only)	
			C - Custom			PTK - Patina Black (Brass Only)	
			36" Max.			C - Custom	



Vista, CA 92081 www.dglights.com info@dglights.com

