


Project \_\_\_\_\_


Type \_\_\_\_\_ Quantity \_\_\_\_\_

The IG4 is an adjustable compact inground fixture. LED light source has +/- 18 degs of tilt and full 360 deg rotation. Heatsink design utilizes entire fixture body.

The IG4 inground is available in multiple trim finishes and lens options. Soil or concrete applications. Suitable for wet locations.

### Specification

Light Sources	COB LED Module *
LED Rated Life	50,000 hours average **
Power Consumption	8 Watts Maximum
Power Input	10-15Vac
CCT	2700K, 3000K, 4000K, 5000K
CRI	93
Light Output	200-600 Lumens
Lens	1/4 inch Thick Clear Tempered Borosilicate Glass
Fasteners	Stainless steel
Pour Collar	Stainless steel Collar / PVC Sleeve
Gasket	High Temp Silicone
Aiming	+/- 18 deg Tilt, 360 deg Rotation, Fixed Vertical
Operating Temperature	-31F to 130F (-35C to 54C)
Maintenance	Field serviceable Driver and LED module
Thermal Management	Fixture is utilized as heat sink
Fixture Construction	CNC Machined from Solid Billet
Glare Accessories	Aluminum, Black Anodized
Ingress Protection	IP67
Certification	

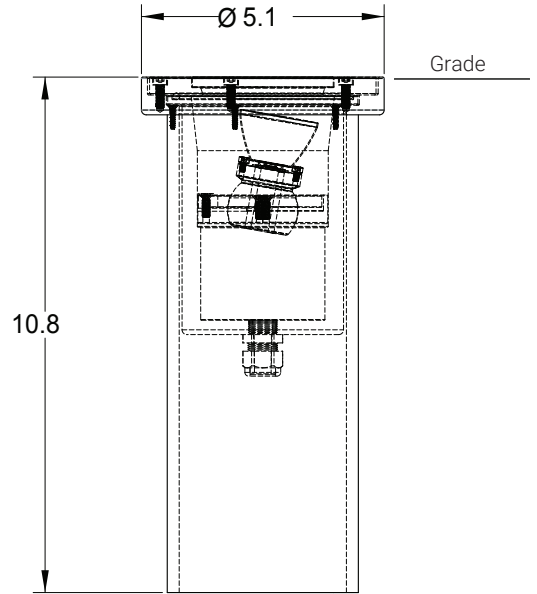

Dimensions inches

\* IES LM-80 Standard ensures led light source will provide lumen maintenance and color performance.

\*\* LED life is defined as the time to 70% lumen maintenance (L70)


### Features

- Interchangeable Reflectors
- Multiple Glare Options
- Fully Adjustable light source
- Dim 10-100%, MLV, ELV


#### Glare Control




01




02



03



04



G  
Rock Guard

### Ordering Guide

Example: IG4-BR-30-36-00-N IG4 Inground, Brass Trim, 3000K, 36 deg Beam, No Hex, Natural Trim Finish

IG4							
Prefix	Trim Material	LED Color	Wattage	Beam	Accessory	Trim Guard	Trim Finish
	BR - Brass	27 - 2700K	3 - 240 lm	18 - 16 deg	00 - None	00 - None	N - Natural
	CU - Copper	30 - 3000K	5 - 425 lm	24 - 24 deg	01 - Slot	G - Rock Guard	BK - Black Powder Coat
	SS - Stainless	40 - 4000K	8 - 600 lm	36 - 36 deg	02 - Eyelid		PTB - Patina Brown (Brass Only)
		50 - 5000K		60 - 60 deg	03 - Target		PTK - Patina Black (Brass Only)
				115 - 115 deg	04 - Center		C - Custom
					HX - Hex Cell		