Project Type Quantity

The RL150 is micro pendant fixture intended to illuminate objects from ceiling /surface mount. Recessed light source provides glare free illumination. Available in 3 differnt body styles and cord or fixed stem mounts.

Specification

Light Source CR8 Led Lamp * Quick Change
LED Rated Life 50,000 hours average **

Power Consumption 1W, 2W, 3W, 5W Options
CCT 2700K, 3000K, 4000K, 5000K

CRI 93

Light Output 65, 130, 195, 325 Lumens

Driver/Trans. Location Remote

Lens Borosilicate Glass Clear

Lamp holder GU5.3

Operating Temperature -31F to 130F (-35C to 54C)

Maintenance Tool Free Plug-in LED Lamp
Thermal Management Fixture is utilized as heat sink
Fixture Construction CNC Machined from Solid Billet
Ingress Protection IP66

Ingress Protection IP





^{*} IES LM-80 Standard ensures led light source will provide lumen maintenance and color performance.

Remote LED Driver/Low Voltage Transfromer Required





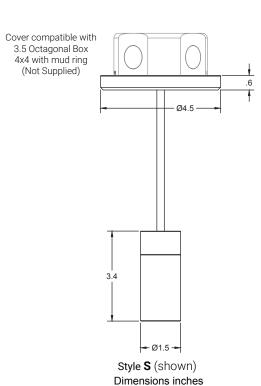



Ordering Guide

DI 4 FO

Example: RL150-AL-R-27-25-3-HX-C12-P-12-BK Aluminum, Round Housing, 2700K, 25deg Beam, 3Watt, Hex Cell, Cord 12 ft, No Cover, ELV Dimming, Powder Coat Black Finish

RL150										
Prefix	Material	Style	CCT	Beam	Watt	Accessory	Cord/Stem	Mounting	Dimming	Finish
	AL - Alum	T - Taper	27 - 2700K	18 - 18 deg	1 - 65 lm	00 - None	C Cord 1-15 ft.	CV - 4.5 dia.Cover	12 - 12Vac ELV	N - Natural
	BR - Brass	R - Round	30 - 3000K	25 - 25 deg	2 - 130 lm	HX - Hex Cell	S - Stem 3-24 in	. CP - 4.5" dia.	10 - 0-10V	BK - Black Powder Coat
		S - Straight	35 - 3500k	40 - 40 deg	3 - 195 lm		Add length to Prefix Ex. C5 = Cord 5 ft	Cover Pivot*	120-277V	WT - White Powder Coat
			40 - 4000K 50 - 5000K		5 - 325 lm			P - Cord Only		MP - Metallic Powder Coat
										PTB - Patina Brown (Brass Only)
									t	PTK - Patina Black (Brass Only)
								* Select option for stem		CH - Chrome
								sloped ceiling application	ons	C - Custom





^{**} LED life is defined as the time to 70% lumen maintenance (L70)