
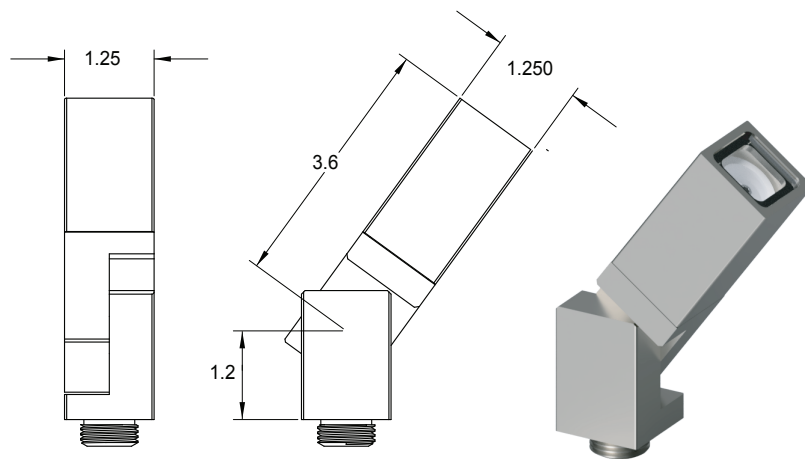


Project \_\_\_\_\_ Type \_\_\_\_\_ Quantity \_\_\_\_\_

The XTSQ is used to illuminate objects from ground or surface mount. Constructed from CNC machined parts. 10 inch ABS stake standard mounting, optional cast brass stake or stainless pedestal mount. CR8 LED Lamp allows for tool free beam changes and re-lamping.

## Specification

Light Source	CR8 Led Lamp * Quick Change
LED Rated Life	50,000 hours average **
Power Consumption	1W, 2W, 3W, 5W Options
CCT	2700K, 3000K, 4000K, 5000K
CRI	93
Light Output	65, 130, 195, 325 Lumens
Input	10-15 Vac
Lens	Borosilicate Glass
Lamp holder	GU5.3
Operating Temperature	-31F to 130F (-35C to 54C)
Maintenance	Tool Free Plug-in LED Lamp
Thermal Management	Fixture is utilized as heat sink
Fixture Construction	CNC Machined from Solid Billet
Ingress Protection	IP67 Uplight/Downlight Applications
Certification	



Dimensions inches

\* IES LM-80 Standard ensures led light source will provide lumen maintenance and color performance.

\*\* LED life is defined as the time to 70% lumen maintenance (L70)


## Low Voltage Transformer Required

**CR8 LED Lamp**  
Compression Heat Sink™  
PATENT PENDING




Renewable Product

End of lamp life -  
Replace lamp electronics  
Re-use lamp body




1 - Angle End Cap

### Ground Mount Options ( Not to Scale )

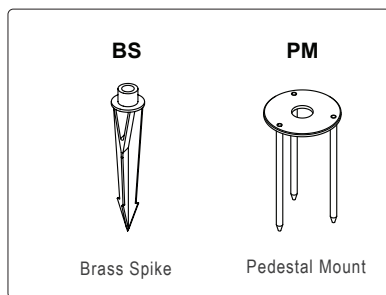

### Surface Mount Options ( Not to Scale )

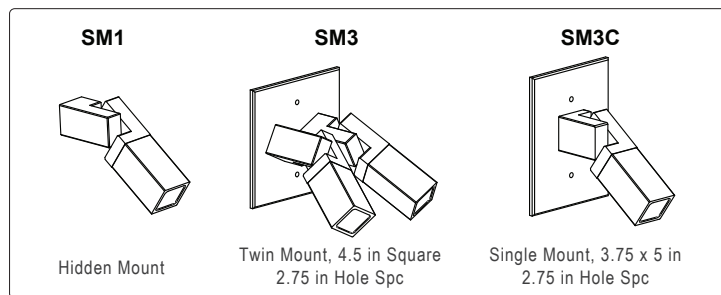

## Ordering Guide

Example: XTSQ-AL-27-25-5-HX-SM3C-CA Alum Material, 2700K, 25deg Beam, 5Watt, Hex Cell, Plate Single Mount, Brushed Clear Anodize Finish

### XTSQ

Prefix	Material	CCT	Beam	Watt	Accessory	End Cap	Mounting	Finish
AL	Aluminum	27 - 2700K	18 - 18 deg	1 - 65 lm	00 - None	0 - Flush	S - Standard	N - Natural (Brass/Copper/Stainless)
BR	Brass	30 - 3000K	25 - 25 deg	2 - 130 lm	HX - Hex Cell	1 - Angle	BS - Brass Stake	CA - Clear Anodize (Aluminum)
CU	Copper	40 - 4000K	40 - 40 deg	3 - 195 lm			PM - Pedestal	BK - Black Powder Coat
SS	Stainless	50 - 5000K		5 - 325 lm			SM1 - Hidden	WT - White Powder Coat
							SM3 - Twin Head	MP - Metallic Powder Coat
							SM3C - Single	PTB - Patina Brown (Brass Only)
							CS - Custom	PTK - Patina Black (Brass Only)
								C - Custom