


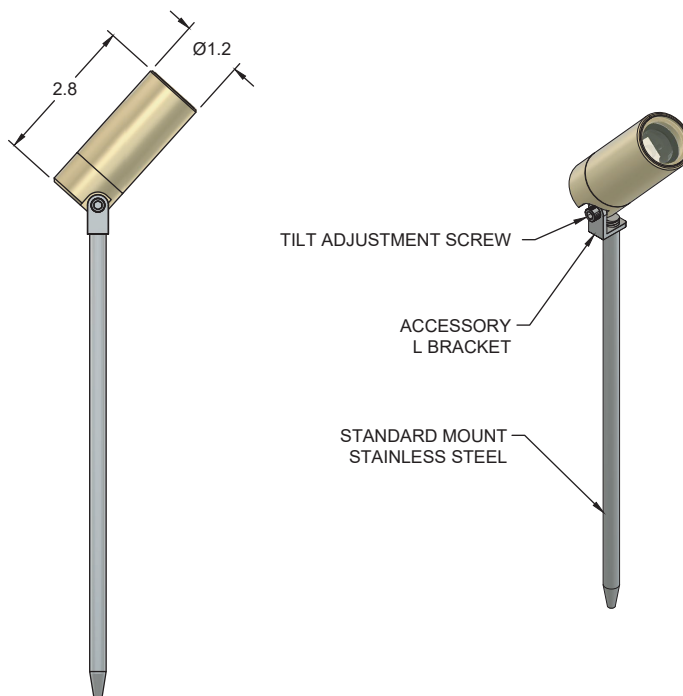
Project \_\_\_\_\_ Type \_\_\_\_\_ Quantity \_\_\_\_\_

The P50 is a small but powerful spot light well suited for many applications requiring an inconspicuous fixture. Mounting options include, spike, tree and surface. Use spike mount for soil installations such as planters and hedges. For surface mount installations simply remove spike. The P50 can be used on smaller trees where other larger or strap fixtures can not.

The P50's small size is created from precision CNC machined parts. CR8 LED Lamp allows for tool free beam changes and re-lamping.

### Specification

Light Source	CR8 Led Lamp * Quick Change
LED Rated Life	50,000 hours average **
Power Consumption	1W, 2W, 3W Options
CCT	2700K, 3000K, 4000K, 5000K
CRI	93
Light Output	70, 140, 210 Lumens (3000K)
Input	10-15 Vac
Lens	Borosilicate Glass
Lamp holder	GU5.3
Operating Temperature	-31F to 130F (-35C to 54C)
Maintenance	Tool Free Plug-in LED Lamp
Thermal Management	Fixture is utilized as heat sink
Fixture Construction	CNC Machined from Solid Billet
Ingress Protection	IP67
Certification	



Dimensions inches [ mm ]

\* IES LM-80 Standard ensures led light source will provide lumen maintenance and color performance.

\*\* LED life is defined as the time to 70% lumen maintenance (L70)


### Low Voltage Transformer Required



Renewable Product

**End of Life**  
Replace lamp electronics  
Re-use lamp body

### Accessories

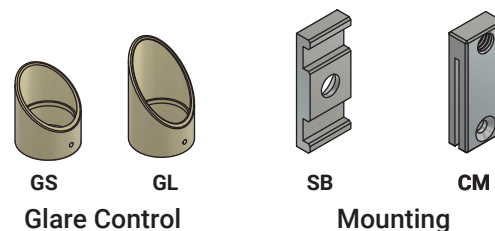

### Ordering Guide

P50							
Prefix	Material	CCT	Beam	Watt	Accessory	Mounting	Finish
AL - Aluminum	27 - 2700K	10 - 10 deg	1 - 70 lm	00 - None	SP - 9 inch Spike	N - Natural (Brass/Copper/Stainless)	
BR - Brass	30 - 3000K	110 - 110 deg	2 - 140 lm	HX - Hex Cell	HB - Hanger Bolt	BK - Black Powder Coat	
CU - Copper	40 - 4000K	30 - 30 deg	3 - 210 lm	GS - Glare Short	CM - Clip Mount	BN - Brown Powder Coat	
SS - Stainless	50 - 5000K	40 - 40 deg		GL - Glare Long	SB - Strap Bracket	PTB - Patina Brown (Brass/Copper Only)	
		60 - 60 deg				PTK - Patina Black (Brass/Copper Only)	
		90 - 90 deg				C - Custom	

Note: All mounting includes fixture with L bracket.

HB includes lock nut



www.dglights.com info@dglights.com