


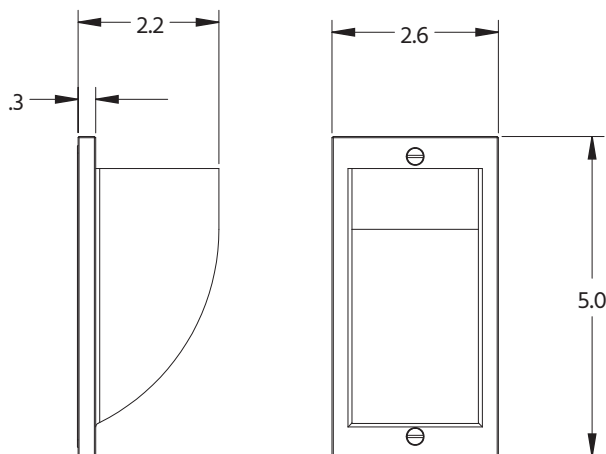
Project _____ Type _____ Quantity _____

The Keystone is a wallmount fixture for up and down applications. Fixture mounts to standard single gang electrical boxes. All fixture components are precision CNC machined. CNC parts provide clean lines and higher performance over cast parts. Cover has bonded waterproof gasket. Innovative inverted heat sink in cover quickly removes heat from inside out.

CR8-Scorpion LED Compression Lamp allows for tool free beam changes and re-lamping.

Specification

Light Source	CR8-SCRIP Led Compression Lamp * Quick Change
LED Rated Life	50,000 hours average **
Power Consumption	3W, 5W, 8W Options
CCT	2700K, 3000K, 3500K, 4000K, 5000K
CRI	93
Light Output	270, 720 Lumens (3000K)
Input	10-15 Vac
Lens	Flush Mount Clear Borosilicate Glass
Lamp holder	GU5.3
Operating Temperature	-31F to 130F (-35C to 54C)
Maintenance	Tool Free Plug-in compression LED Lamp
Thermal Management	Inverted Face Plate Heatsink
Fixture Construction	CNC Machined from Solid Billet
Ingress Protection	IP66
Certification	



* IES LM-80 Standard ensures led light source will provide lumen maintenance and color performance.

** LED life is defined as the time to 70% lumen maintenance (L70)

Low Voltage Transformer Required



Ordering Guide

Example: KS-AL-27-18-8-HX-WT Aluminum Material, 2700K, 18 deg Beam, 8 Watt, Hex Cell, White Powder Coat Finish

Prefix	Material	CCT	Beam	Watt	Accessory	Finish
KS	AL - Aluminum	27 - 2700K	18 - 18 deg	3 - 270 lm	00 - None	N - Natural
	BR - Brass	30 - 3000K	25 - 25 deg	5 - 450 lm	HX - Hex Cell	BK - Black Powder Coat
	CU - Copper	35 - 3500K	36 - 36 deg	8 - 720 lm	LS - Linear	WT - White Powder Coat
	SS - Stainless	40 - 4000K	60 - 60 deg		SF - Soft Focus	PTB - Patina Brown (BR Only)
		50 - 5000K				PTK - Patina Black (BR Only)
						C - Custom (Specify RAL code)