
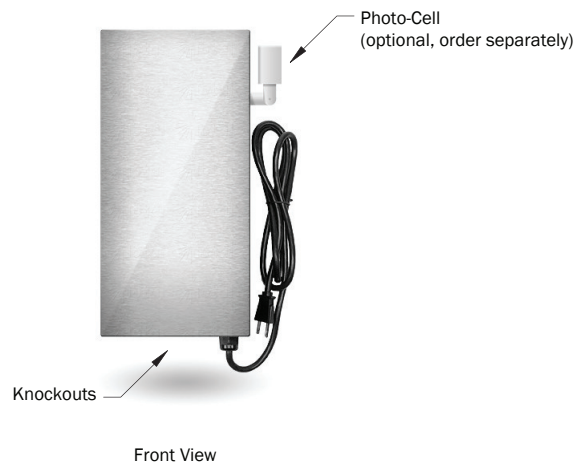


Heavy duty landscape lighting transformer. Use this transformer where a multi-tap is not required. Transformer is wired and ready for a timer and/or photocell (sold separately) . Unit comes with a 6 ft heavy duty power cord and plug pre wired. Stainless steel outdoor enclosure 90W 120/12V Transformer with primary and secondary circuit breaker protection.

Notes:

1. Output voltage 11.8 with 120Vac and fully loaded.
2. Maximum no load input current : 0.5A
3. Enclosure temperature does not exceed 65C in 40C ambient, fully loaded.
4. Transformer fully encapsulated.
5. Dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input line cord - 3x 18 AWG, output terminal block - 150V 55A 105C
7. The transformer uses a class B (130C) insulation system.
8. The transformer has a manual reset thermal 12A circuit breaker on the secondary.
9. Wiring compartment has 3 knockouts sized for 3/4 inch screw cable connectors.
10. The wiring compartment cover is hinged with rivets and opens vertically from bottom to top.
11. The enclosure is made of stainless steel and NEMA 3R rated.
12. UL listed E194005

Dimensions inches [mm]

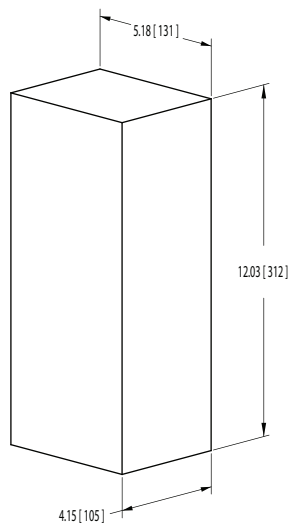

2880 Scott St., Bldg 107, CA 92011  
760-734-1123 760-734-1176 Fax  
www.dglights.com info@dglights.com